






2016 CATALOG

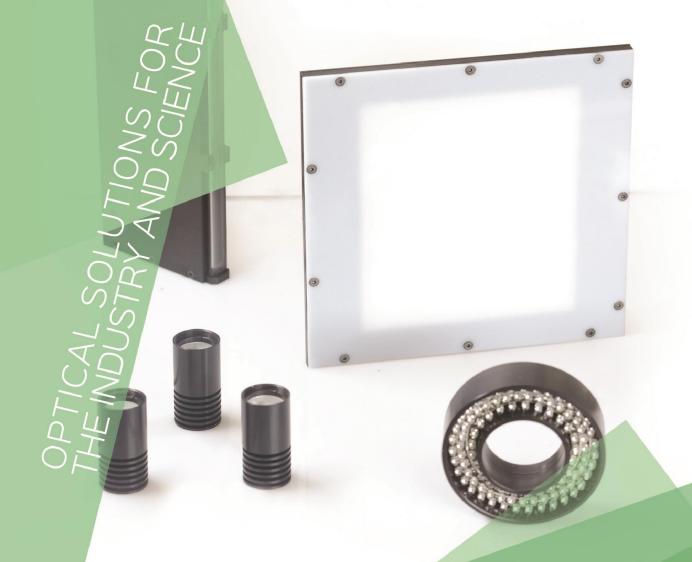


www.omi-optika.hu

LED Ring Lights





Standard Ring Light



Large Area Ring Light



UV Ring Light

LED Ring Lights provide direct illumination with high and even intensity on specular or opaque surfaces. Beam angle is factory adjusted according to customers' demand on working distance (WD) and illuminated area size.

Specifications:

- white, UV, blue, green, red or NIR light
- power requirement: 12V DC or 24V DC (please specify when ordering)
- available with power supply with optional trigger input
- continuous or strobe operation (depends on power supply)
- > 50.000 h lifetime
- robust, anodized alu or plastic housing
- designed to operate in harsh industrial environment
- please call for IP classified versions

LED Ring Lights


Product Number	Dimensions (mm)	Light emitting surface (mm)	Wave- length (nm)	Available IP protection
3-056-000	Ø80/Ø40x30	Ø80/Ø40	white	IP65
3-057-000	Ø100/Ø60x29	Ø100/Ø60	white	IP65
3-057-600	Ø100/Ø60x29	Ø100/Ø60	465	IP65
3-060-000	Ø100/Ø45x30	Ø100/Ø45	white	IP65
3-061-000	Ø100/Ø45x30	Ø100/Ø45	850	IP65
3-063-000	Ø80/Ø50x30	Ø80/Ø50	375	IP65
3-064-000	Ø80/Ø40x24	Ø80/Ø40	white	IP65
3-075-000	150x150x45/∅90	Ø125/Ø100	640	IP65
3-076-000	150x150x30/∅90	Ø125/Ø76	640	IP65
3-080-000	Ø70/Ø50x23	Ø70/Ø50	640	IP65


More standard and custom versions are available.

For specific wavelength, shape, power, dimension, housing etc. visit www.omi-optika.hu, send a message to info@omi-optika.hu or call +36-1-392-2278.

OMI OPTIKA Mérnökiroda Kft. info@omi-optika.hu own OPTICS Engineering Ltd

LED Darkfield Lights









LED Darkfield (Low Angle) Lights are suitable for highlighting surface roughnes, surface structure, edges with the help of light nearly parallel with the surface.

Specifications:


- white, UV, blue, green, red or NIR light
- power requirement: 12V DC or 24V DC (please specify when ordering)
- available with power supply with optional trigger input
- continuous or strobe operation (depends on power supply)
- > 50.000 h lifetime
- robust, anodized alu or plastic housing
- designed to operate in harsh industrial environment
- please call for IP classified versions

LED Darkfield (Low Angle) Ligths

Product number	Dimensions (mm)	Illuminated area (mm)	Wave- length (nm)	Available IP protection
3-067-000	100x100x10/∅60	Ø60	640	IP65
3-077-000	150x150x10/∅100	Ø100	640	IP65
3-078-000	150x150x10/∅100	Ø100	850	IP65


More standard and custom versions are available.

LED Dome Lights




LED Dome Light






LED Low-Angle Dome Light



LED Dome Light typical dimensions



LED Low-Angle Light typical dimensions

LED Dome Lights ensure even, shadowless illumination for inspecting specular, uneven or curved surfaces. Shadows and reflections generated by the surface can be avoided this way.

Specifications:


- white, UV, blue, green, red or NIR light
- power requirement: 12V DC or 24V (please specify when ordering)
- available with power supply with optional trigger input
- continuous or strobe operation (depends on power supply)
- > 50.000 h lifetime
- robust, anodized alu housing
- designed to operate in harsh industrial environment


LED Dome Lights

Product number	Dimensions (mm)	Illuminated surface (mm)	Wavelength (nm)
3-085-000	140x140x67	Ø80	640
3-087-000	Ø70/Ø30x40	Ø 5 0	White
3-090-000	Ø122/Ø80x60	Ø80	White

More standard and custom versions are available.

LED Coaxial Lights







30x30 LED Coaxial Light



100x50 LED Coaxial Light

LED Coaxial Lights ensure even, diffuse, axial illumination for inspecting glossy surfaces.


Specifications:


- white, UV, blue, green, red or NIR light
- power requirement: 12V DC or 24V DC (please specify when ordering)
- available with power supply with optional trigger input
- continuous or strobe operation (depends on power supply)
- > 50.000 h lifetime
- robust, anodized alu housing
- designed to operate in harsh industrial environment

LED Co	LED Coaxial Lights					
Product number	Dimensions (mm)	Light emitting surface (mm)	Wavelength (nm)	Available IP protection		
3-301-000	90x40x40	30x30	640	IP65		
3-304-000	110x100x60	100x50	640	IP65		


More standard and custom versions are available.

Standard LED Backlights









Standard LED Backlights ensure homogen illumination to display contours of objects sized up to 100 mm with high contrast. Also applicable as diffuse lighting.

Specifications:

- white, blue, green, red or NIR light
- homogen intensity distribution
- power requirement: 12V DC or 24V DC (please specify when ordering)
- available with power supply with optional trigger input
- continuous or strobe operation (depends on power supply)
- > 50.000 h lifetime
- robust, anodized alu housing
- glass or plastic illumination surface
- designed to operate in harsh industrial environment
- please call for IP classified versions

Slim Standard Backlights:

- typical thickness: 8 to 10 mm
- illuminating area: <~50 mm x < ~50 mm

Thin Standard Backlights

- thickness: 12 mm
- illuminating area: <~50 mm x < ~50 mm

Thick Standard Backlights

- typical thickness: 20 mm
- illuminating area: <~100 mm x < ~100 mm

Standard LED Backlights

Product number	Dimensions (mm)	Light emitting surface (mm)	Wavelength (nm)	Available IP protection
3-107-000	30x14x10	15x10	525	IP65
3-106-000	42x30x8	25x25	640	IP65
3-108-000	60x60x12	40x40	640	IP65
3-201-000	100x100x20	80x80	640	IP65


More standard and custom versions are available.


For specific wavelength, shape, power, dimension, housing etc. visit www.omi-optika.hu, send a message to info@omi-optika.hu or call +36-1-392-2278.

Slim Standard Backlights

OMI OPTICS Engineering Ltd

Large LED Backlights





Typical dimensions



Slim Large LED Backlight



Standard Large Backlight

Large LED Backlights ensure homogen illumination to display contours of objects larger than 100 mm with high contrast. Also applicable as diffuse lighting.

Specifications:

- white, blue, green, red or NIR light
- homogen intensity distribution
- power requirement: 12V DC or 24V DC (please specify when ordering)
- available with power supply with optional trigger input
- continuous or strobe operation (depends on power supply)
- > 50.000 h lifetime
- robust, anodized alu housing
- plastic illumination surface
- designed to operate in harsh industrial environment
- please call for IP classified versions

Standard Large LED Backlights:

- typical thickness: 25 mm
- light emitting surface: >~100 mm x >~100 mm

Slim Large LED Backlights (edge-lit):

- typical thickness: 10 mm

Large LED Backlights

- light emitting surface: >~100 mm x >~100 mm

Product number	Dimensions (mm)	Light emitting surface (mm)	Wavelength (nm)	Available IP protection
3-207-000	130x190x25	100x160	Red	IP65

3-207-000	130x190x25	100x160	Red	IP65
3-212-000	200x200x30	200x150	White	IP65
3-240-000	235x240x10	200x200	Red	IP65
3-241-000	180x180x10	120x140	White	IP65


More standard and custom versions are available.

For specific wavelength, shape, power, dimension, housing etc. visit www.omi-optika.hu, send a message to info@omi-optika.hu or call +36-1-392-2278.

JMI OPTICS Engineering Ltd

TEL.: +36 1 392 2278 +36 30 950 113



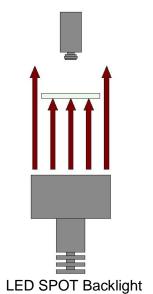



LED SPOT Backlight


LED SPOT Backligths offer extra large intensity for exposures in the microsecond range. Simple installation, no maintenance. Recommended also for limited space applications.

Specifications:

- white, blue, green, red or NIR light
- power consumption: max. 3 W
- homogene intensity distribution
- light emitting area: ø35 mm
- power requirement: constant current
- available with power supply with optional trigger input
- continuous or strobe operation (depends on power supply)
- > 50.000 h lifetime
- robust, anodized alu housing
- dimensions: ø40/ø25x50 mm
- plastic or glass light emitting surface
- designed to operate in harsh industrial environment
- please call for IP classified versions

More standard and custom versions are available.

LED Spot Lights



LED SPOT Light



LED SPOT Lights



LED SPOT Light with gooseneck

LED SPOT Lights including one power LED offer high intensity for a wide range of application with maintenance-free passive cooling.

Specifications:

- white, blue, green, red or NIR light
- power consumption: max. 3 W
- beam angle: 8°, 30°, 50° or 10°x50°
- power requirement: constant current
- available with power supply with optional trigger input
- continuous or strobe operation (depends on power supply)
- > 50.000 h lifetime
- robust, anodized alu housing
- compact size: ø25 x 50 mm
- fixing with M4 screw
- cable outlet on the side
- designed to operate in harsh industrial environment
- please call for IP classified versions


Typical field of use:

- products, workpieces
- laboratory tests
- machine vision measurements, calibrations
- microscopic inspections
- workpieces to be machined (eg. milling, lathing etc.)

LED SPOT Lights				
Product number	Dimensions (mm)	Light emitting surface (mm)	Wavelength (nm)	Available IP protection
3-402-000/ 1W/3W/5W	Ø25x45	Ø18,5	any color	IP65
3-410-000/ 1W/3W/5W	Ø25x45+120 (goose neck)	Ø18,5	any color	IP65

More standard and custom versions are available.

LED Spot Modul Lights



LED SPOT Light



9x3W RGB Modul Light



4x3W Modul Light

LED SPOT Modul Lights include multiple LED SPOT Lights offering extreme intensity with maintenance-free passive cooling and individually adjustable reflectors.

Specifications:


- power consumption: max. n x 3 W
- beam angle: from 10° up to 180°
- white, UV, blue, green, red, yellow or NIR light
- power requirement: constant current
- available with power supply with optional trigger input
- continuous or strobe operation (depends on power supply)
- circle, ring or line layout
- > 50.000 h lifetime
- robust, anodized alu housing with robust fixing
- designed to operate in harsh industrial envinroment
- please call for IP classified versions

	LED SPOT Modul Lights					
Product Dimensions Light emittin surface (mm) (mm)			Wavelength (nm)	Available IP protection		
	3-402-200/ 1W/3W/5W	Ø80x87	Ø18,5x4pcs	any color	IP65	
	3-456-000/ 1W/3W/5W	200x50x80	170x30	any color	IP65	

More standard and custom versions are available.

RGB LED Spot Lights









RGB LED SPOT Lights offer three separately controllable LED chips integrated into one compact modul. A wide range of visible color gamut or white light can be achieved with integrated color mixing optics. RGB LED SPOT Lights are also available in moduls to achive greater intensity.

Specifications:

- white or coloured light
- power consumption: max. 3 W
- beam angle: 30°
- power requirement: constant current
- separately adjustable intensity for each chip
- available with power supply with optional trigger input
- continuous or strobe operation (depends on power supply)
- > 50.000 h lifetime
- robust, anodized alu housing
- compact size: ø25 x 50 mm
- fixing with M4 screw
- cable outlet on the side
- designed to operate in harsh industrial environment
- please call for IP classified versions

Typical field of use:

- enhancing contrast depending on the color of the workpiece in machine vision inspection
- illumination with variable color at laboratory tests
- museum display cases
- artworks
- illuminations for photography


3x1W RGB LED SPOT Lights					
Product number	Dimensions (mm)	Light emitting surface (mm)	Wavelength (nm)	Available IP protection	
3-403-000	Ø25x45	⊘24	RGB	IP65	
3-411-000	Ø25x45+120 (goose neck)	Ø 24	RGB	IP65	

More standard and custom versions are available.


For specific wavelength, shape, power, dimension, housing etc. visit www.omi-optika.hu, send a message to info@omi-optika.hu or call +36-1-392-2278.

OMI OPTIKA Mérnökiroda Kft. info@omi-optika.hu DMI OPTICS Engineering Ltd


Spot Projectors



LED Spot Projector



Typical pattern



Projector for 3D scanning

LED SPOT Projector Lights illuminate workpieces of any size with a Structured Light. Usually optimised for a given distance, but also available with focusable optics.

We offer LED SPOT Projectors to project light spots with definite size or diamaters, or with any pattern e.g. for 3D scanning.

Specifications:

- power consumption: max. 3 W
- projecting distance: max. ~3 m
- white, blue, green, red or NIR light
- available with custom size or pattern (Structured Light)
- even intensity distribution
- power requirement: constant current
- available with power supply with optional trigger input
- continuous or strobe operation (depends on power supply
- > 50.000 h lifetime
- robust, anodized alu housing
- compact size: ø25 x 50 mm
- fixing with M4 screw
- cable outlet on the side
- designed to operate in harsh industrial envinroment
- please call for IP classified versions

More standard and custom versions are available.

For specific wavelength, shape, power, dimension, housing etc. visit www.omi-optika.hu, send a message to info@omi-optika.hu or call +36-1-392-2278.



LED SPOT Projector with fixed focus



LED SPOT Projector with interchangable C-mount lens


OMI OPTIKA Mérnökiroda Kft. info@omi-optika.hu

LED Line Lights





LED Line Light

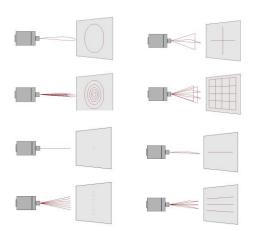

Typical Laser Patterns

LED Line Lights illuminate objects, signs, labels, or workpieces passing in front of a sensor e.g. a line-camera. Direct line illumination is a special lighting used in industrial machine vision automated inspections.

Specifications:

- LED light source projecting a straight line with high intensity
- plastic cylindrical lens
- white, blue, green, red or NIR light
- compact, anodized alu housing
- fixing with M5 screws
- working distance: 50-200 mm, focusable or fix
- > 50.000 h lifetime
- length of illuminated area: 50-300 mm
- width of illuminated area: 3-20 mm
- power requirement: 24 VDC
- available with power supply with optional trigger input
- continuous or strobe operation (depends on power supply)

LED Line Lights				
Product number	Dimensions (mm)	Light emitting surface (mm)	Wavelength (nm)	
3-015-000	250x60x20	250x10	White	

Professional Laser Illuminations

Specifications:

- diffractive optics without moving parts, maintenance-free
- structured laser light
- focusable
- power requirement: 5V DC
- available with power supply with optional trigger input
- continuous or strobe operation (depends on power supply)
- professional semiconductor laser chips
- available with multiple wavelengts
- designed to operate in harsh industrial environment
- robust, anodized aluminium housing
- available with adjustable fixing

Typical patterns:

- dot, dot-series
- line, parallel lines
- cross, grid
- circle, concentric circles
- custom patterns are also available on demand

More standard and custom versions are available.

For specific wavelength, shape, power, dimension, housing etc. visit www.omi-optika.hu, send a message to info@omi-optika.hu or call +36-1-392-2278.

OMI OPTICS Engineering Ltd

LED Light Sources for Fibers



LED Light Source for Fiber Optics

LED Light Sources for Fiber Optics offer longlife illumination for fiber optics application. Tens of thousands of hours lifetime, dimmable, constant color temperature.

Flexible or semi-rigid fibers are available with custom length and with focusable optics.

Specifications:

- nominal max. luminous flux: 1500 lm
- dimming with front panel knob or via Trigger Input
- dimensions: 250 x 220 x 117 mm
- power source: 230 V AC, max. 50 W
- short-driven external trigger
- thermal protection with internal heatswitch
- weight: 2,6 kg
- > 50.000 h lifetime
- available with custom wavelength LEDs


LED Light Source for Fiber Optics				
Product number	Dimensions (mm)	Fiber connection dimension	Fiber diameter	
3-650-000	250x220x117 mm	Ø14x37 mm	Ø6 mm	

More standard and custom versions are available.



Focusable Optics

LED Matrix Lights



Typical dimensions



White LED Matrix Lights



NIR LED Matrix Lights

LED Matrix Lights illuminate objects, signs, labels or workpieces with light emitted by a large surface area. This kind of direct illumination offers high intensity for a wide range of application.

Specifications:

- white, UV, blue, green, red or NIR light
- power source: 12V DC or 24V DC
- available with power supply with optional trigger input
- continous or strobe operation (depends on power supply)
- > 50.000 h lifetime
- robust, anodized alu housing
- compact size
- fixing with M4 screw
- designed to operate in harsh industrial environment

LED Matrix Lights				
Product number	Dimensions (mm)	Light emitting surface (mm)	Wavelength (nm)	
3-005-000	40x20x22	32x16	640	
3-001-000	70x30x45	64x26	630	
3-002-000	70x30x45	64x26	880	
3-003-000	70x30x45	64x26	white	

More standard and custom versions are available.

LED Power Supplies



Power Supply with built in knob



Power Supply with multiple outputs



Power Supply with multiple knobs and switch

LED Power Supplies and Drivers are available in several versions depending on user requirements: dimmable, triggerable, with one or more outputs, typically with DIN rail mounting.

Because of the varied fields of applications, details must be specified when ordering.

Specifications:

- switched-mode circuits
- available dimmable with built in knob or analog signal
- available with external trigger input
- typical versions:
 - 12V DC or 24V DC input, constant current output
 - 230V AC input, constant current ouput
 - 230V AC input, 5V DC, 12V DC or 24V DC output available with multiple outputs
- DIN rail mounting
- flickerless technology

LED Power Supplies


Product number	Input / Output	Dimming/Triggering	
7-260-000	12VDC / 5VDC		
7-204-000	24VDC / 1A	built in knob	
7-210-000	24VDC / 100mA	trigger + knob	
7-201-000	230VAC / 24VDC		

More standard and custom versions are available.

Optical Accessories



Optical microstructures for calibration



Optical mirrors



C-mount spacers



Assembly workshop

Optical microstructures for calibration

We offer optical microstructures for calibration and measurement purpose. Micrometer-range precision, microlitographic technology. Please call for custom figures and substrates. Large printed versions are available as well.

Optical Mirrors

We manufacture and refurbish front or rear surface aluminium coated mirrors.

Extension tubes, spacer rings

We manufacture and offer extension tubes and spacers for C-mount lenses and for other kind of industrial optics. Custom length and versions with electronically isolated threads are available as well.

Optical subassemblies

We manufacture, assemble and calibrate optical components and subassemblies in a workshop with clean area.

More standard and custom versions are available.

For specific wavelength, shape, power, dimension, housing etc. visit www.omi-optika.hu, send a message to info@omi-optika.hu or call +36-1-392-2278.




Optical subassamblies


)MI OPTICS Engineering Ltd.

OMI OPTIKA Mérnökiroda Kft. info@omi-optika.hu

Production Restoration



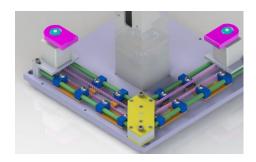

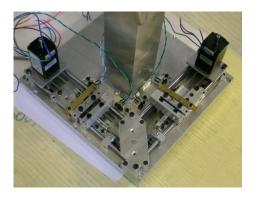

High precision aperture for neutron imaging

PGAA – NIPS neutron tomograph

Optical and optomechanical systems and devices

We design, develop, produce and install optical and optomechanical devices and equipments.

Please call for in-line machine vision equipments for non-contact quality inspection.

We design, develop and manufacture optomechanical devices for research and science.

Restoring and refurbishing optical devices

Restoring, repairing

We restore historical optical devices and instruments, achieving the original and functional condition: surveying instruments e.g. theodolites, old binoculars, astronomical telescopes etc. We repair, renew, restore and clean binoculars, riflescopes and other optical devices.

Refurbishing, modernization

We refurbish, functionally repair, renew and calibrate optical devices, instruments and tools by repairing or replacing the optical, mechanical and electrical components: industrial



Refurbished X-Y measuring microscope



Renewed heliometer Fraunhoffer 1817

OMI OPTIKA Mérnökiroda Kft. info@omi-optika.hu JMI OPTICS Engineering Ltd

Machine Vision Lenses







Machine


- Production
- Control
- Logistics

Vision

- Up to 5MP
- Compact design
- Ultra-low distortion

Systems

- CMOSIS compatible
- 4K Board
- Infra-Red solutions





Telecentric lenses





OMI OPTIKA Mérnökiroda Kft. info@omi-optika.hu

Mérnökiroda Kft. OMI OPTIKA Engineering Ltd. H-172 BIDAPEST LIVE OF STATE O FOUNDALISMIN TO STATE OF M. IN 1993 Shiray Oklivo Silko Yun into on in Opina in the opinal +36 1 392 2278 1135 +36 30 950 1135